








11.0 HORSEPOWER WINTER APPLICATION

MODEL	LH358SA, HMSK110
HORSEPOWER	11.0 7.46 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	56 lbs. 25.45 kg
BOLT MTG. CIRCLE	3.625 90 mm

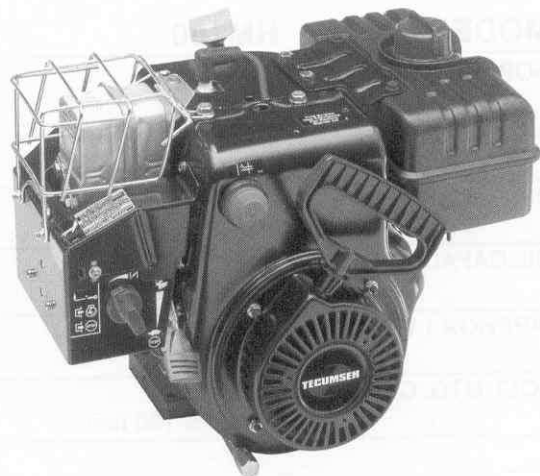

FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered® to prevent ice buildup and engine shut downs.
- Cast iron cylinder sleeve for extended engine life. (Enduro® XL only)
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

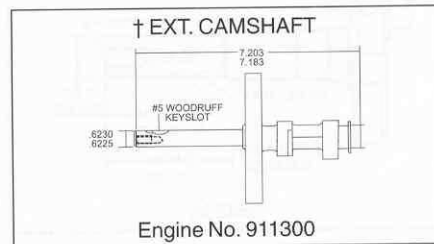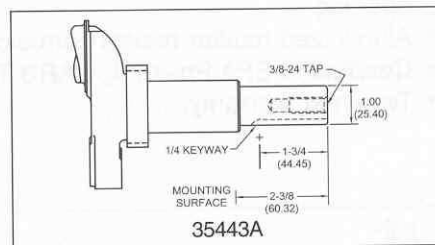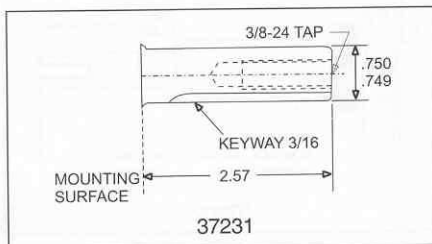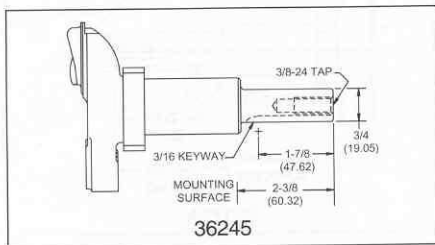

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed	Notes
911300B	Standard	36245	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450	* †
911301B	Standard	35443A	3 Amp A.C.	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3250	*
911304B	Standard	36245	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600	*
911305B	Standard	35443A	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450	*
911307	Standard	37231	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600	*

* 33329E - 120 volt electric crankshaft can be installed.

† 2:1 extended camshaft